



GE Structured Products

LEXAN® XL10 SHEET

Product Warranty

10-YEAR LIMITED WARRANTY

If LEXAN® XL10 sheet breaks within ten (10) years from the date of sale due to manufacturing defect and subject to the conditions set forth herein, then the purchaser, or a fabricator designated by the purchaser, will receive free flat replacement LEXAN XL10 sheet, provided the failed sheet, original sales receipt and this warranty are returned to General Electric Company or the original dealer. If a replacement sheet cannot be provided within fourteen (14) days, General Electric Company may opt to refund the original sheet purchase price.

If excessive yellowing or loss of light transmission as defined herein occurs during a seven (7) year period from the date of sale due to manufacturing defect and subject to the conditions set forth herein, General Electric Company will provide flat replacement LEXAN XL10 sheet to the purchaser or a fabricator designated by the purchaser according to the following schedule. If excessive yellowing or light transmission as defined herein occurs after seven (7) and before ten (10) years from the date of sale due to a manufacturing defect and subject to the conditions set forth herein, General Electric Company will replace the material at a cost to the purchaser of 1/120th of the original cost for each month from the date of sale. The failed sheet, original sales receipt and this warranty must be returned to General Electric Company or the original dealer. If a replacement sheet cannot be provided within fourteen days, General Electric Company may opt to refund the pro-rated cost of the original sheet.

CONDITIONS

This warranty applies only to sheet fabricated, installed, and cleaned according to General Electric Company recommendations. It is important to note that LEXAN XL10 sheet is designed for weathering resistance and does NOT provide abrasion resistance; no warranties are extended on the abrasion resistance characteristics of this product. The warranty does not cover (re)installation or fabrication expenses or any other direct or indirect loss(es) which may result from the sheet failure.

Breakage: This warranty against breakage applies only to sheet fabricated, installed, and cleaned according to General Electric recommendations. LEXAN XL10 sheet has 30 times the impact strength of acrylic. However, no material can be described as unbreakable, for it is impossible to account for all types of usage.

Yellowing and Light Transmission: The warranty against yellowing and light transmission applies only to Clear Transparent (112) LEXAN XL10 sheet. The Yellowness Index (YI) of LEXAN XL10 sheet, cleaned according to the recommendations of General Electric Company, shall be less than 5 during a five-year period from the date of sale, and shall be less than 10 during a ten-year period from the date of sale, as determined according to ASTM D1925, as measured with a Gardner Colorimeter (Instrument Conditions: Illuminant C, 2° Observer). The light transmission characteristics of LEXAN XL10 sheet, cleaned according to the recommendations of General Electric Company, shall not decrease by more than 5% during a five-year period from the date of sale, and shall not decrease by more than 7% during a ten-year period from the date of sale, when tested by the procedure specified in ASTM D1003, as measured by a Gardner Colorimeter (Instrument Conditions: Illuminant C, 2° Observer). This warranty is limited to excessive yellowing and loss of light transmission due to the degradation of LEXAN XL10 sheet and does not cover yellowing or light transmission losses due to dirt, atmospheric deposits, or abrasion. You should be aware that all outdoor materials are subject to irreversible depositions of atmospheric elements and can be expected to show signs of hazing eventually. Regular, proper cleaning will significantly reduce, but not eliminate, that process. (See reverse side for cleaning and maintenance instructions.) This warranty does not cover abrasion or scratching.

THE WARRANTIES STATED IN THIS PUBLICATION ARE THE ONLY WARRANTIES MADE BY GENERAL ELECTRIC COMPANY WITH RESPECT TO LEXAN XL10 SHEET AND ARE IN LIEU OF ALL WARRANTIES, WRITTEN OR ORAL, STATUTORY, EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR PURPOSE.

GENERAL ELECTRIC COMPANY SHALL NOT BE LIABLE FOR ANY SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES ARISING OUT OF THE USE OR APPLICATION OF LEXAN XL10 SHEET WHETHER A CLAIM FOR DAMAGES IS BASED UPON WARRANTY, CONTRACT, TORT OR ANY OTHER LEGAL THEORY. UNDER NO CIRCUMSTANCE SHALL GENERAL ELECTRIC COMPANY BE LIABLE FOR ANY AMOUNT GREATER THAN THE ORIGINAL PRICE PURCHASER PAID FOR THE LEXAN XL10 SHEET.

THE REMEDIES PROVIDED HEREIN ARE PURCHASER'S SOLE AND EXCLUSIVE REMEDIES.

Notice: This dealer is authorized to fulfill the above obligations of this warranty to the purchaser at the expense of: General Electric Company, Structured Products, One Plastics Avenue, Pittsfield, Massachusetts 01201 (1-800-451-3147).

This limited warranty must be completed by the dealer at the time of sale.

Customer Name: _____

Dealer Name: _____


Date of Sale: _____

GE Lot Number: _____



CLEANING PROCEDURES

LEXAN® sheet, like all plastics should be cleaned periodically. A regular, once-a-year cleaning program will help prevent noticeable weathering and dirt build up. The proper procedure for field cleaning is to sponge or spray on Formula 409¹ household cleaner full strength, followed by a cold water rinse. This will remove dirt and grime and restore clarity to the sheet.

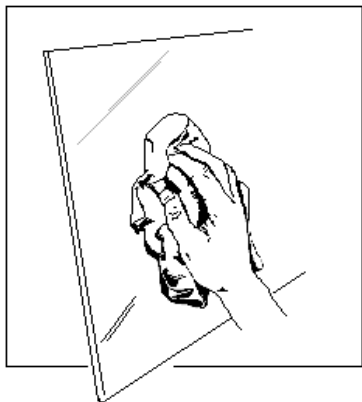

**For more information
call: (800) 451-3147.**

CLEANING PROCEDURES

1. Rinse sheet with lukewarm water.
2. Wash sheet with a mild soap and lukewarm water.
3. Use a soft cloth or sponge and gently wash to loosen remaining dirt and grime. DO NOT SCRUB or use brushes or squeegees: the coating on LEXAN XL10 sheet is UV resistant. *It is not a mar-resistant coating.*
4. Repeat rinse and dry with a soft cloth to prevent water spotting.
5. Do not clean in direct sunlight.

CLEANING AGENTS WHICH HAVE BEEN FOUND TO BE COMPATIBLE WITH LEXAN XL10 SHEET UNDER LABORATORY CONDITIONS

Formula 409¹
 Joy²
 Windex with Ammonia D³
 Palmolive Liquid⁴
 Top Job²
 Freon T.F.
 VM&P Grade Naphtha
 Butyl Cellosolve
 Isopropyl Alcohol

¹Registered Trademark of the Clorox Company.

²Registered Trademarks of Procter & Gamble.

³Registered Trademark of the Dracett Products Company.

⁴Registered Trademark of Colgate Palmolive.

IMPORTANT: If a material is found to be incompatible in a short-term test, it will usually be found to be incompatible in the field. The converse, however, is not always true. Favorable performance is no guarantee that actual end-use conditions have been duplicated. Therefore, these results should be used as a guide only and it is recommended that the products be tested under actual end-use conditions by the user.

DISCLAIMER: THE MATERIALS AND PRODUCTS OF THE BUSINESSES MAKING UP THE GE PLASTICS UNIT OF GENERAL ELECTRIC COMPANY, ITS SUBSIDIARIES AND AFFILIATES, ("GEP") ARE SOLD SUBJECT TO GEP'S STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT, PRINTED ON THE BACK OF ORDER ACKNOWLEDGMENTS AND INVOICES, AND AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, GEP MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING GEP MATERIALS, PRODUCTS, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN GEP'S STANDARD CONDITIONS OF SALE, GEP AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS OR PRODUCTS DESCRIBED HEREIN. EACH USER BEARS FULL RESPONSIBILITY FOR MAKING ITS OWN DETERMINATION AS TO THE SUITABILITY OF GEP'S MATERIALS, PRODUCTS, RECOMMENDATIONS, OR ADVICE FOR ITS OWN PARTICULAR USE. EACH USER MUST IDENTIFY AND PERFORM ALL TESTS AND ANALYSES NECESSARY TO ASSURE THAT ITS FINISHED PARTS INCORPORATING GEP MATERIALS OR PRODUCTS WILL BE SAFE AND SUITABLE FOR USE UNDER END-USE CONDITIONS. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of GEP's Standard Conditions of Sale or this Disclaimer, unless any such modification is specifically agreed to in a writing signed by GEP. No statement contained herein concerning a possible or suggested use of any material, product or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of General Electric Company or any of its subsidiaries or affiliates covering such use or design, or as a recommendation for the use of such material, product or design in the infringement of any patent or other intellectual property right.



GE Structured Products

General Electric Company
 One Plastics Avenue, Pittsfield, MA 01201-3697